





Parameter	Value
$V_{DS}$	650 V
$V_{GS}$	3.5 V
$I_{DM}$	17.4 A
$E_{AS}$	169 mJ
$E_{oss}@400V}$	5.2 J

g Tested

- Pb-free Lead Plating
- Halogen-free and RoHS-compliant

DFN8080-4L	4	H65R190A	1	-55 to 150	13-inch Reel	3000
------------	---	----------	---	------------	--------------	------

$V_{DS}$	*) \$	V
$V_{GS}$	- ' \$	V
$I_{DM}$		A
$I_{AS}$		A
$E_{AS}$		mJ
$D_8$	%) *	
$T_{J5}$		

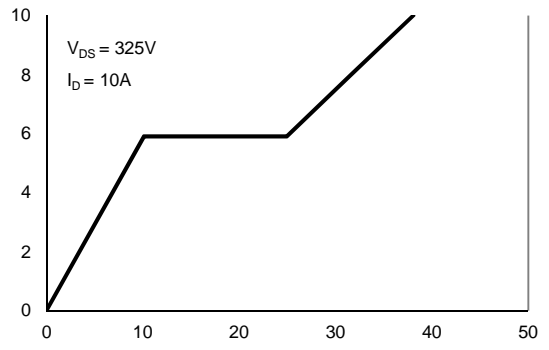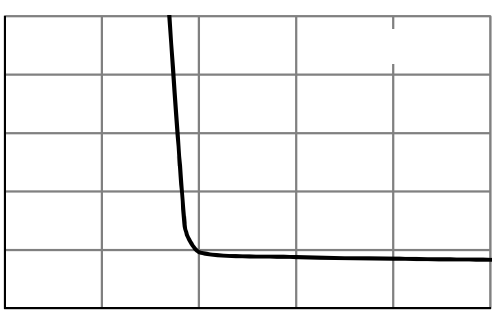



	$V_{(BR)DSS}$	650			V
	$I_{DSS}$	$V_{DS} = 650V, V_{GS} = 0V$		1.0	A
	$I_{GSS}$			$\pm 100$	nA
Gate Threshold Voltage	$V_{GS(th)}$	2.5	3.5	4.5	V
	$R_{DS(ON)}$		169	190	m
	$V_{SD}$		0.75	1.0	V
	$I_S$			156	A



	$C_{iss}$		1560		pF
	$C_{oss}$				





---

---

---

---

---



