




ACJ T40510C 4A TRIAC

Rev. A. 1.1

DESCRIPTION:

The ACJT40510C triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT40510C embeds a TVS structure to absorb the inductive turn-energy such as those described in the IEC 61000-4-5 standards. Package TO-220C is RoHS compliant.



MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T <sub>stg</sub>	-40~150	
Operating junction temperature range	T <sub>j</sub>	-40~125	
Repetitive peak off-state voltage (f <sub>r</sub> ≤25 )	V <sub>DRM</sub>	1000	V
Repetitive peak reverse voltage (f <sub>r</sub> ≤25 )	V <sub>RRM</sub>	1000	V

Peak pulse voltage ( $T_j=25$ ; non-repetitive, off state; FIG.7)	$V_{pp}$	3	kV
--	----------	---	----


ELECTRICAL CHARACTERISTICS ( $T_j=25$  unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
$I_{GT}$	$V_D = 12V$ $R_L = 33$	- -	MAX.	5	mA
$V_{GT}$		- -	MAX.	1	V
$V_{GD}$	$V_D = V_{DRM}$ $T_j = 125$ $R_L = 3.3k$	- -	MIN.	0.2	V
$I_L$	$I_G = 1.2I_{GT}$	-	MAX.	15	mA
				20	
$I_H$					



FIG.1 :

FIG.7 Test circuit for inductive loads to IEC 6100045 standards

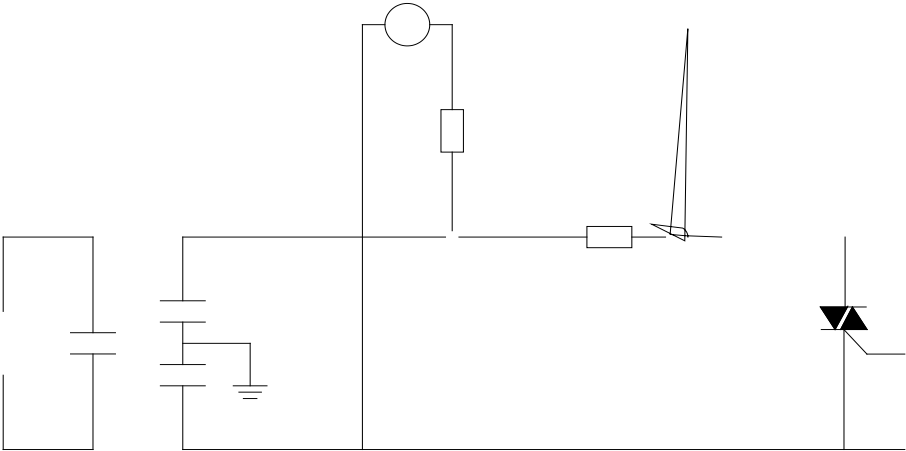



PACKAGE MECHANICAL DATA



