



ELECTRICAL CHARACTERISTICS (unless otherwise specified)

Symbol	Test Condition
--------	----------------

ORDERING INFORMATION

<u>J</u>	<u>ST</u>	<u>134</u>	<u>W</u>	<u>-600</u>	<u>T</u>
JieJie Microelectronics Co., Ltd.	Triacs	$I_T(RMS):1A$	$W:SOT-223-2L$	$600:V_{DRM} / V_{RRM} 1600 V$	$T:I_{GT1-4} 0.05mA$

MARKING

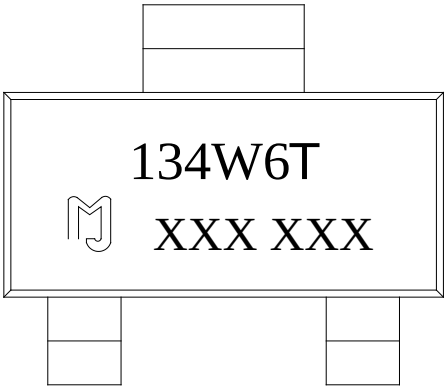


FIG.1: Maximum power dissipation versus RMS on-state current


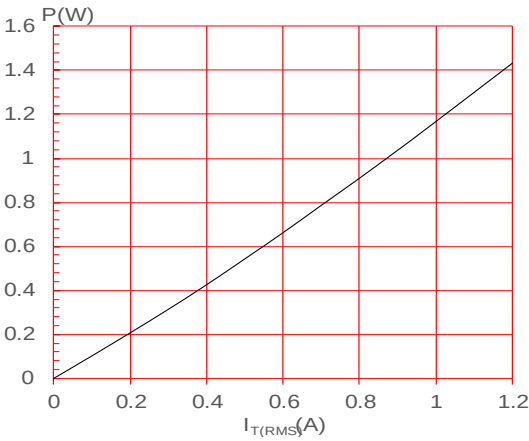


FIG.2: RMS on-state current versus case temperature

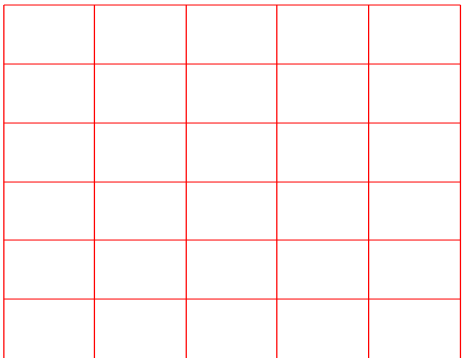


JST134W-600T

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA) - I	Package	Base qty. (pcs)	Delivery mode
------------	---	----------------	---------	--------------------	------------------

JST134W-600T

DELIVERY MODE

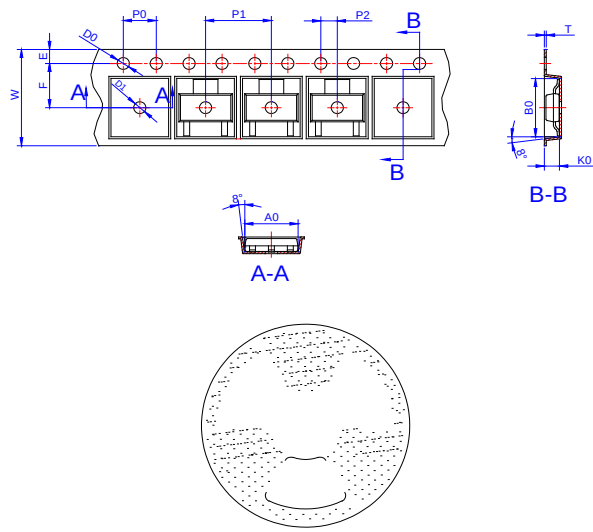

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	-	-	12.30	-		0.482
E	1.65	1.75	1.85	0.065	0.069	0.073
F	5.45	5.50	5.55	0.215	0.217	0.219
D0	1.50	1.55	1.60	0.059	0.061	0.063
D1	1.50	-	-	0.059	-	-
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.95	2.00	2.05	0.077	0.079	0.081
10P0	39.80	40.00	40.20	1.567	1.575	1.583
A0	6.85	6.95	7.05	0.269	0.273	0.276
B0	7.15	7.25	7.35	0.280	0.284	0.288
K0	1.95	2.05	2.15	0.076	0.080	0.084
T	0.20	0.25	0.30	0.008	0.010	0.012

